

High Wall Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	441.4 / 323.7 / 229.6 / 176.6 / 147.2
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	N/A/38/33/20.5/19.5
Dimension (WxDxH)	inch 33.74 x 9.09 x 11.81
	mm 857x231.0x300.0
Package (WxDxH)	inch 36.22x12.20x14.57
	mm 920x310x370
Net/Gross Weight	lbs 23.37/29.98
	kg 10.6/13.6

OUTDOOR SPECIFICATION

Compressor Type	ROTARY
Compressor Model	KTN110D42UFZ
Refrigerant	R454B
Refrigerant Oil Charge(mL)	350
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	1470.6
Outdoor Noise Level (dBA)	56.0
Dimension (WxDxH)	inch 31.69 x 12.99 x 21.81
	mm 805.0x330.0x554.0
Package (WxDxH)	inch 36.02 x 14.57 x 24.21
	mm 915x370x615
Net/Gross Weight	lbs 72.75/78.70
	kg 33/35.7

EFFICIENCY

Cooling		Heating	
SEER2	27.4	HSPF2-4	12.5
EER2	15.4	COP	3.76

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	9000
Min/Max Capacity	3800~13500
Moisture Removal(L/h)	0.3
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	12000
1. @ 47°F Min/Max Capacity	3800~16000
2. @ 17°F Rated	9800
3. @ 5°F Rated: Capacity / COP	11500/1.80
3. @ 5°F Max: Capacity	11500

Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL


Power Supply	208/230V,60Hz,1Ph
System MCA	15.0
Connection Wiring	14#x4
System MOCP	15
Compressor RLA	10.4
Outdoor Fan Motor RLA	0.6
Outdoor Fan Motor W	34
Indoor Fan Motor RLA	0.5
Indoor Fan Motor W	20
System Power Input @ Cooling (W)	580(127 ~ 1180)
System Power Input @ Heating (W)	935(225 ~ 1400)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV
Liquid Size	6.35mm(1/4in)
Gas Size	9.52mm(3/8in)


Max. Piping Length(ft/m)	82.00(25)
Max. Height Difference(ft/m)	49.20(15)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/g)	35.27(1)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.16(15)
Connection Method	Flared

Indoor Unit Dimension

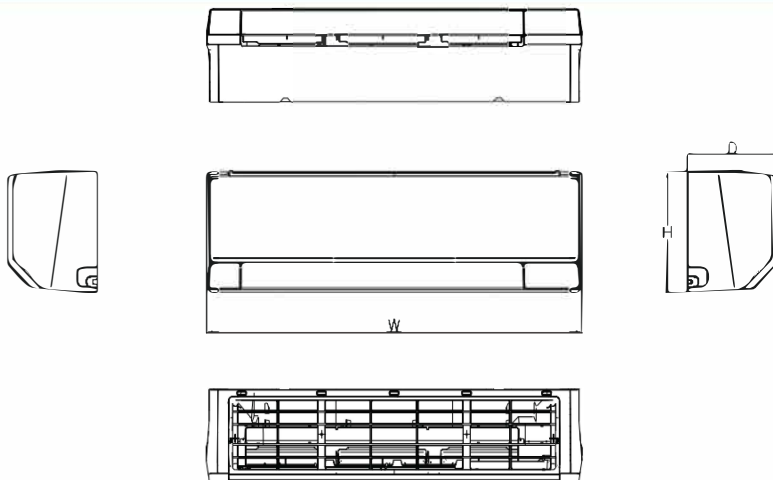


Capacity	Body Code	Unit	W	D	H
6k~12k	B	mm	857	231	300
		inch	33-3/4	9-1/8	11-3/4
18k~24k	C	mm	1024	246	321
		inch	40-1/4	9-3/4	12-5/8
24k~36k	D	mm	1197	280	371
		inch	47-1/8	11	14-5/8

Installation Instruction

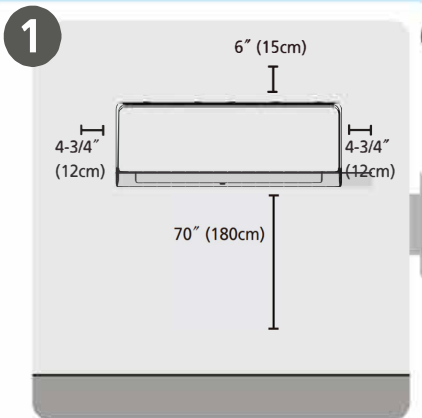


Select Installation Location

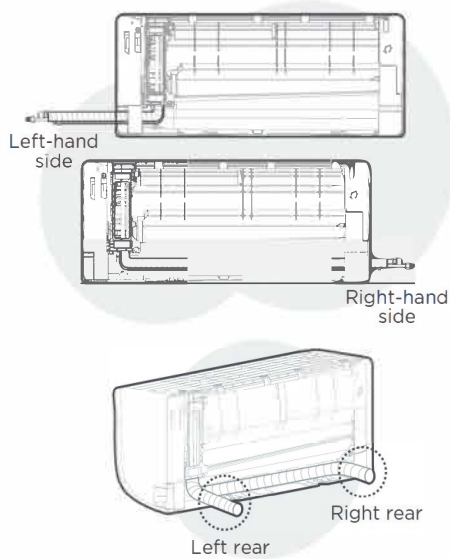

NOTE:

Based on the position of the wall hole relative to the mounting plate, choose the side from which the piping will exit the unit. You have four options for the exit direction of the piping.


Unit: inch(mm)

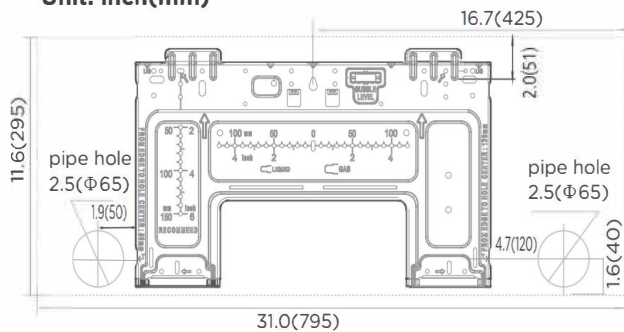


NOTE:

When the gas side connective pipe is $\Phi (5/8\text{in})16\text{mm}$ or more, the wall hole should be $(3-1/2\text{in})90\text{mm}$.

Outdoor Unit Dimension

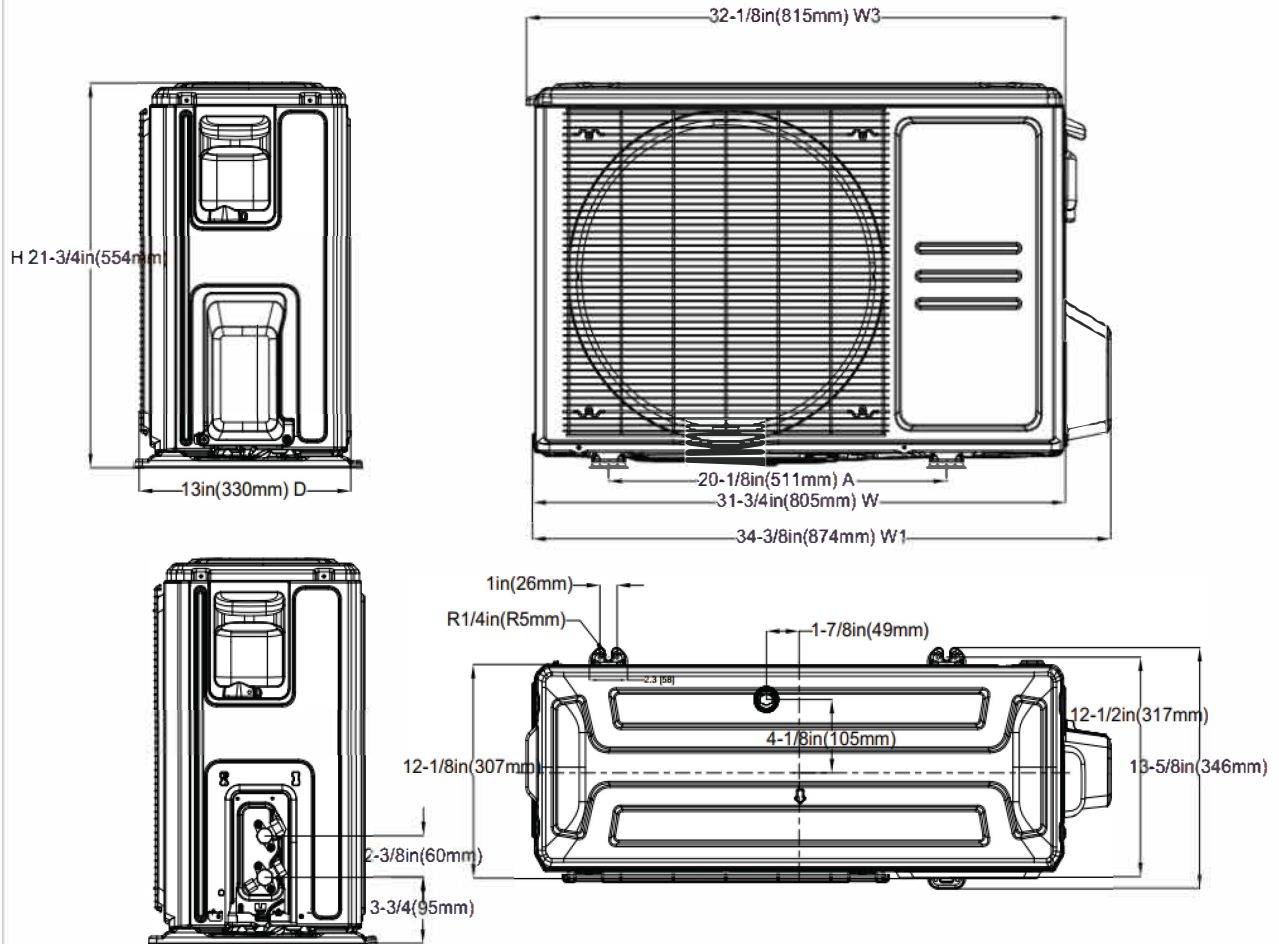

Installation Instruction

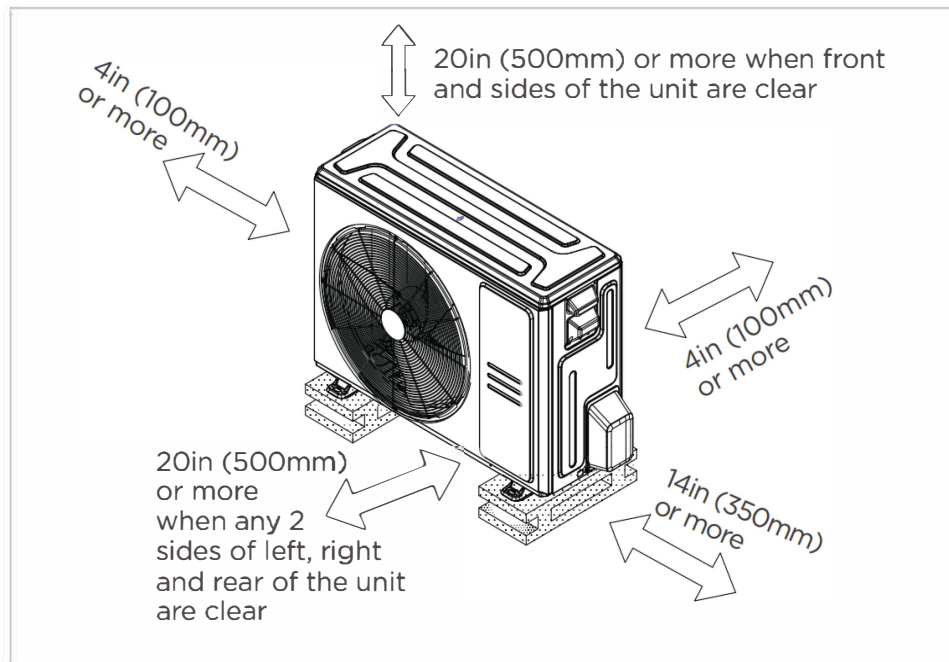

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

- Easy maintenance design
- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- Multiple control options available:
 - Two way communication wired controller: 120N(X6)
 - Two way communication wired controller with built-in WiFi: 120N(X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*